

# 1730 Series.

## Fire-resistant mortise locks

### Specifications

- For European profile cylinder.
- Key action on latch bolt.
- Single throw dead bolt.
- Non-handed.
- Without strike plate.

### Art. 1739/36

Furniture with fixed knob outside is required.  
**In unlocked position latch bolt retracts from the outside only by key action, from the inside by lever handle. In locked position lever handle retracts latch- and dead bolt simultaneously from inside (panic function). Bolts operated from outside by cylinder key only.**

### Art. 1739/46

Furniture with split spindle is required.  
**In unlocked position, latch bolt is operated from both sides by lever handle/key action. In locked position, inside lever handle retracts latch- and dead bolt simultaneously. Outside lever handle retracts latch bolt only. Dead bolt operated by cylinder key.**


### Accessories

- Key-infill piece with set screw Art. BB 1739 and BB 7000 (Page 42).
- Strike plate Art. P 1739/17 stainless steel and 1739/12 zinc-plated (page 41).
- Reduction sleeve 8/9 mm Art. 1769/21 (page 42).



Art. 1739  
 Standards: CE marking, EN 12209 and EN 179 (Panic)

	1739/03	1739/27	1739/28	1739/29	1739/36	1739/46	1739/51	1739/55
Backset 65 mm	•	•	•	•	•	•	•	•
Distance 72 mm	•	•		•	•	•	•	•
Profile cylinder	•	•		•	•	•	•	•
9 mm follower	•	•	•	•	•	•	•	•
Steel, zinc-plated front plate 24 x 235 mm rounded	•		•	•	•	•	•	•
Stainless steel front plate 24 x 235 mm rounded		•						
Steel, zinc-plated lock case	•	•	•	•	•	•	•	•
Steel, zinc-plated latch bolt	•	•	•	•	•	•		•
Zinc-plated roller bolt (adjustable)							•	
Steel, zinc-plated dead bolt	•	•	•	•	•	•	•	
Key action on latch bolt	•	•	•	•	•	•	•	•
Single throw	•	•	•	•	•	•	•	•
Panic one-piece follower					•			
Panic two-piece follower						•		
Zinc-plated security bolt								•
22 mm profile cylinder			•					
Packed per piece		•	•	•	•	•	•	•
Packed per 25 pieces	•							

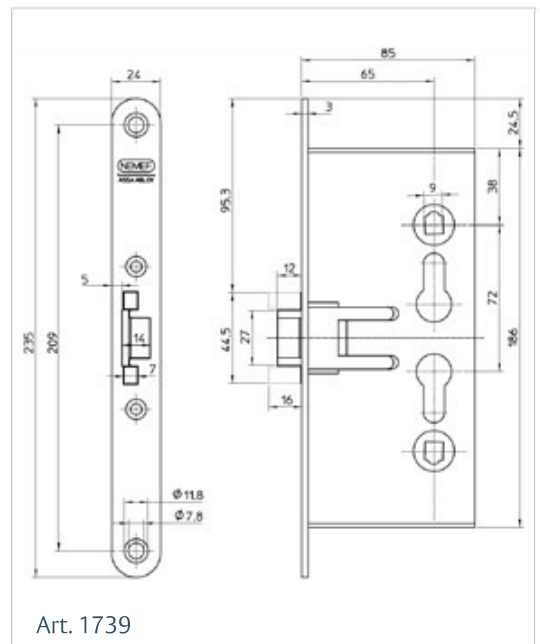

Art. 1739